



1000 Series
Agricultural/Industrial
Power Units
1006-6T
119 kW/159 bhp

A turbocharged 6-cylinder diesel for compressors, excavators, industrial locomotives, agricultural and industrial equipment.

Based on Perkins' 60 years' experience in the development and production of diesel engines, this premium specification engine ensures trouble free operation and high performance in the toughest conditions.

Reliable power

Perkins' high manufacturing standards are approved to ISO 9000. Maximum cooling efficiency is provided by the gear driven water pump and independent fan drive. Leak free operation is ensured by Viton crankshaft seals and controlled swell joints, giving protection in the toughest conditions.

Durable power

A long, trouble free life is assured by the use of the highest quality components throughout the engine, from the deep skirted cylinder block, designed with the aid of computer technology, to premium quality, 3-ring controlled expansion pistons. Enhanced engine life with inserted valve seats, oil spray cooled pistons, and integral plate oil cooler.

High performance, productive power

Good power to weight with high torque and 31% torque back up made possible by Quadram direct injection combustion system matched to high specification turbocharger. At 96 dBA the 1006-6T is probably the quietest engine in its class.

Economical power

An 8% improvement in fuel economy – a direct result of the unique Quadram combustion system.

Easy low cost maintenance

Service intervals to 400 hours for oil and filters. Quick, easy and economical maintenance is made possible by the convenient positioning of service points, for easy accessibility. Improved parts availability and reduced inventory costs are achieved by the true family concept of the 1000 Series, giving parts commonality across the engine range.


Quiet, clean power

Operator and environmentally friendly with low noise, rapid startability and low emissions, achieved with the Quadram and high specification fuel injection equipment.

Performance Data	Gross Intermittent*	Speed rev/min	Net Intermittent	Speed rev/min
Power Output (kW)	119	2600	107	2600
Power Output (bhp)	159	2600	143.5	2600
Peak Torque (Nm)	577	1600	516	1600
Peak Torque (lbf ft)	425	1600	380	1600

Power output for a run-in engine after 60 hours.
 *Rating Standard ISO (TR) 14396

1000 Series 1006-6T

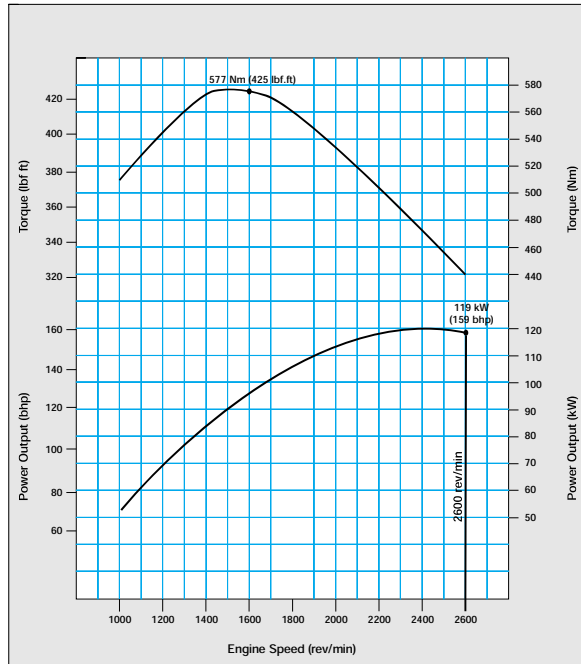

Note: Lower speed ratings may not be read from this curve. Other ratings are available, please consult your Perkins representative.

Engine Specification

- Cast iron engine block
- Flywheel and flywheel housing
- Rotary fuel injection pump
- Fuel filter and prefilter
- All-speed mechanical governor
- Low inertia injectors
- Turbocharger
- Inlet manifold
- Cast iron exhaust manifold – centre outlet
- Lub. oil sump
- Spin on oil filter and oil cooler
- 12V/24V starter and alternator
- Choice of cooling fans belt driven
- Gear driven coolant pump
- Lub. oil pressure switch
- Cold start aid



Perkins Engines Company Limited

Peterborough PE1 5NA
United Kingdom
Telephone +44 (0)1733 583000
Fax +44 (0)1733 582240
www.perkins.com

All information in this leaflet is substantially correct at the time of printing but may be changed subsequently by the Company



Option Groups

A selection of optional items is available to enable the customer to make up a specification precisely matched to his needs. These include alternative ratings, inlet manifolds, exhaust outlets, a range of flywheels and flywheel housings to suit various clutches and transmissions and a selection of power take-offs.

General Data

Bore and stroke	100 mm x 127 mm (3.937 in x 5.00 in)
Number of cylinders	6 in-line
Cubic capacity	6.0 litres (365.0 cu.in.)
Cycle	4 stroke
Aspiration	Turbocharged
Combustion system	Quadram direct injection
Compression ratio	16:1
Firing order	1.5.3.6.2.4
Rotation	Anti-clockwise, viewed on flywheel
Cooling	Liquid
Length	933.9 mm (36.8 in)
Width	683 mm (26.9 in)
Height	783 mm (30.8 in)
Dry Weight	419 kg (922 lb)

Overall dimensions and weight will depend on final specification

