



***For Your Convenience: This Caterpillar
File Is Shared By Diesel Parts Direct***



YOUR ONE STOP SUPERSTORE FOR DIESEL ENGINE PARTS


SHOP NOW



CATERPILLAR

3304

MARINE ENGINE

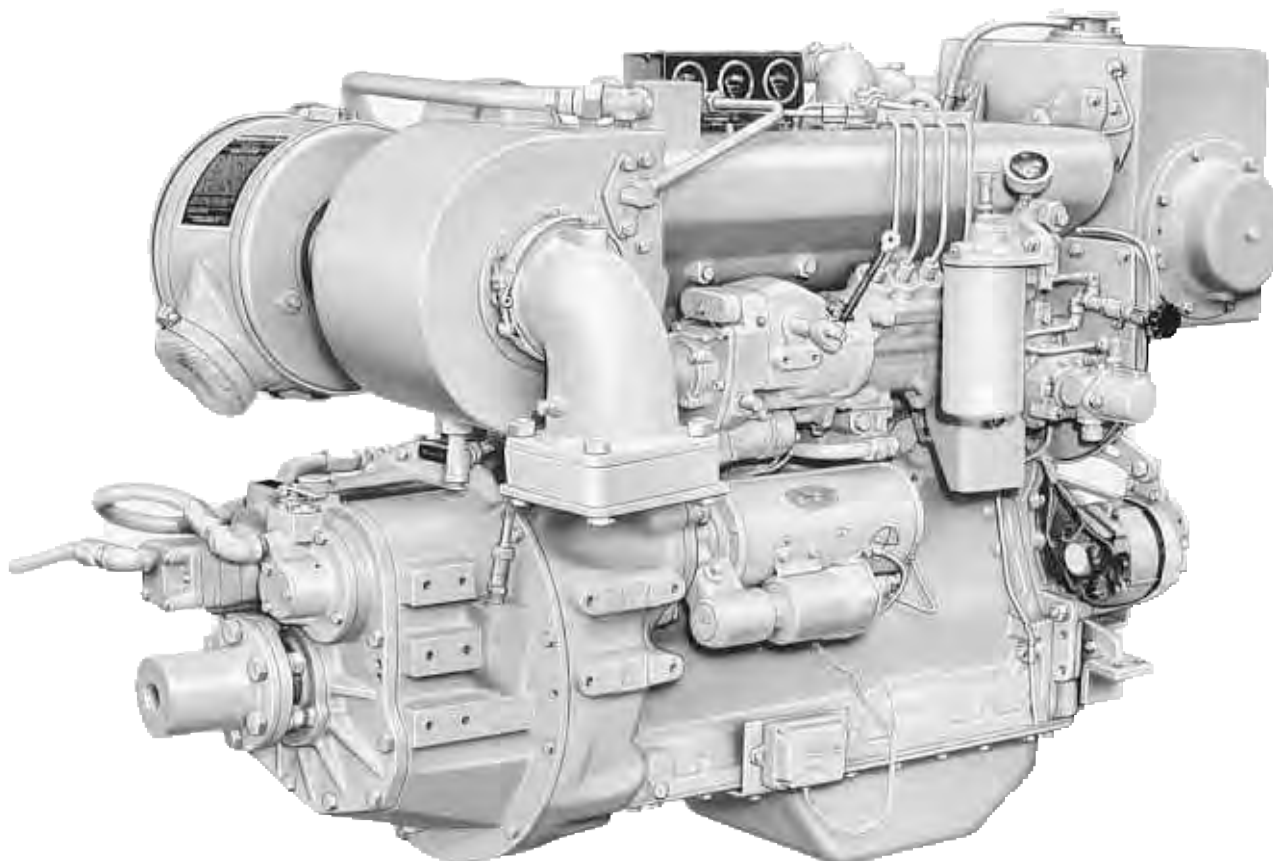

MARINE ENGINE

		Turbocharged Model	Natural Aspiration
Maximum (Flywheel)*	BHP	200	115
@ 2200 RPM	HP (metric)	203	117
Intermittent (Flywheel)*	BHP	165	100
@ 2200 RPM	HP (metric)	167	101
Continuous (Flywheel)	BHP	125	85
@ 2000 RPM	HP (metric)	127	86
Continuous (Shaft)	BHP	121	82
@ 2000 RPM	HP (metric)	123	84
Approx. Fuel Consumption	Gal/Hr	7.4	5.2
@ Full Cont. Shaft HP	Lit/Hr	28,1	19,7

*For Maximum & Intermittent Applications, consult Factory.

DESCRIPTION

Four stroke cycle, Diesel

Number of cylinders..... In-Line 4

Bore and stroke: inches..... 4.75 x 6.00

millimetres..... 121 x 152

Displacement: cu. in..... 425

litres..... 7,0

Low idle speed..... 650 RPM


Engine Rotation..... SAE Standard

Approximate dry weight lb kg lb* kg*


Engine (T) (NA*)..... 1900 861 1850 840

Marine gear..... 340 154 340 154


Total..... 2240 1015 2190 994

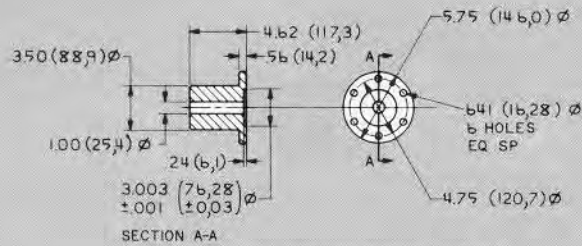

DETAIL OF COMPANION FLANGE 6L8385

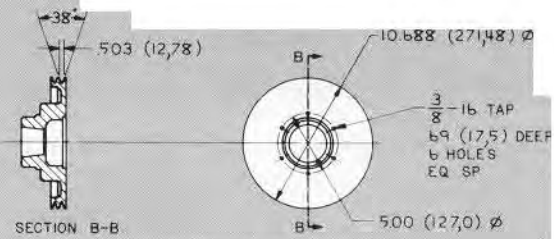

DETAIL OF CRANKSHAFT PULLEY 8L5016

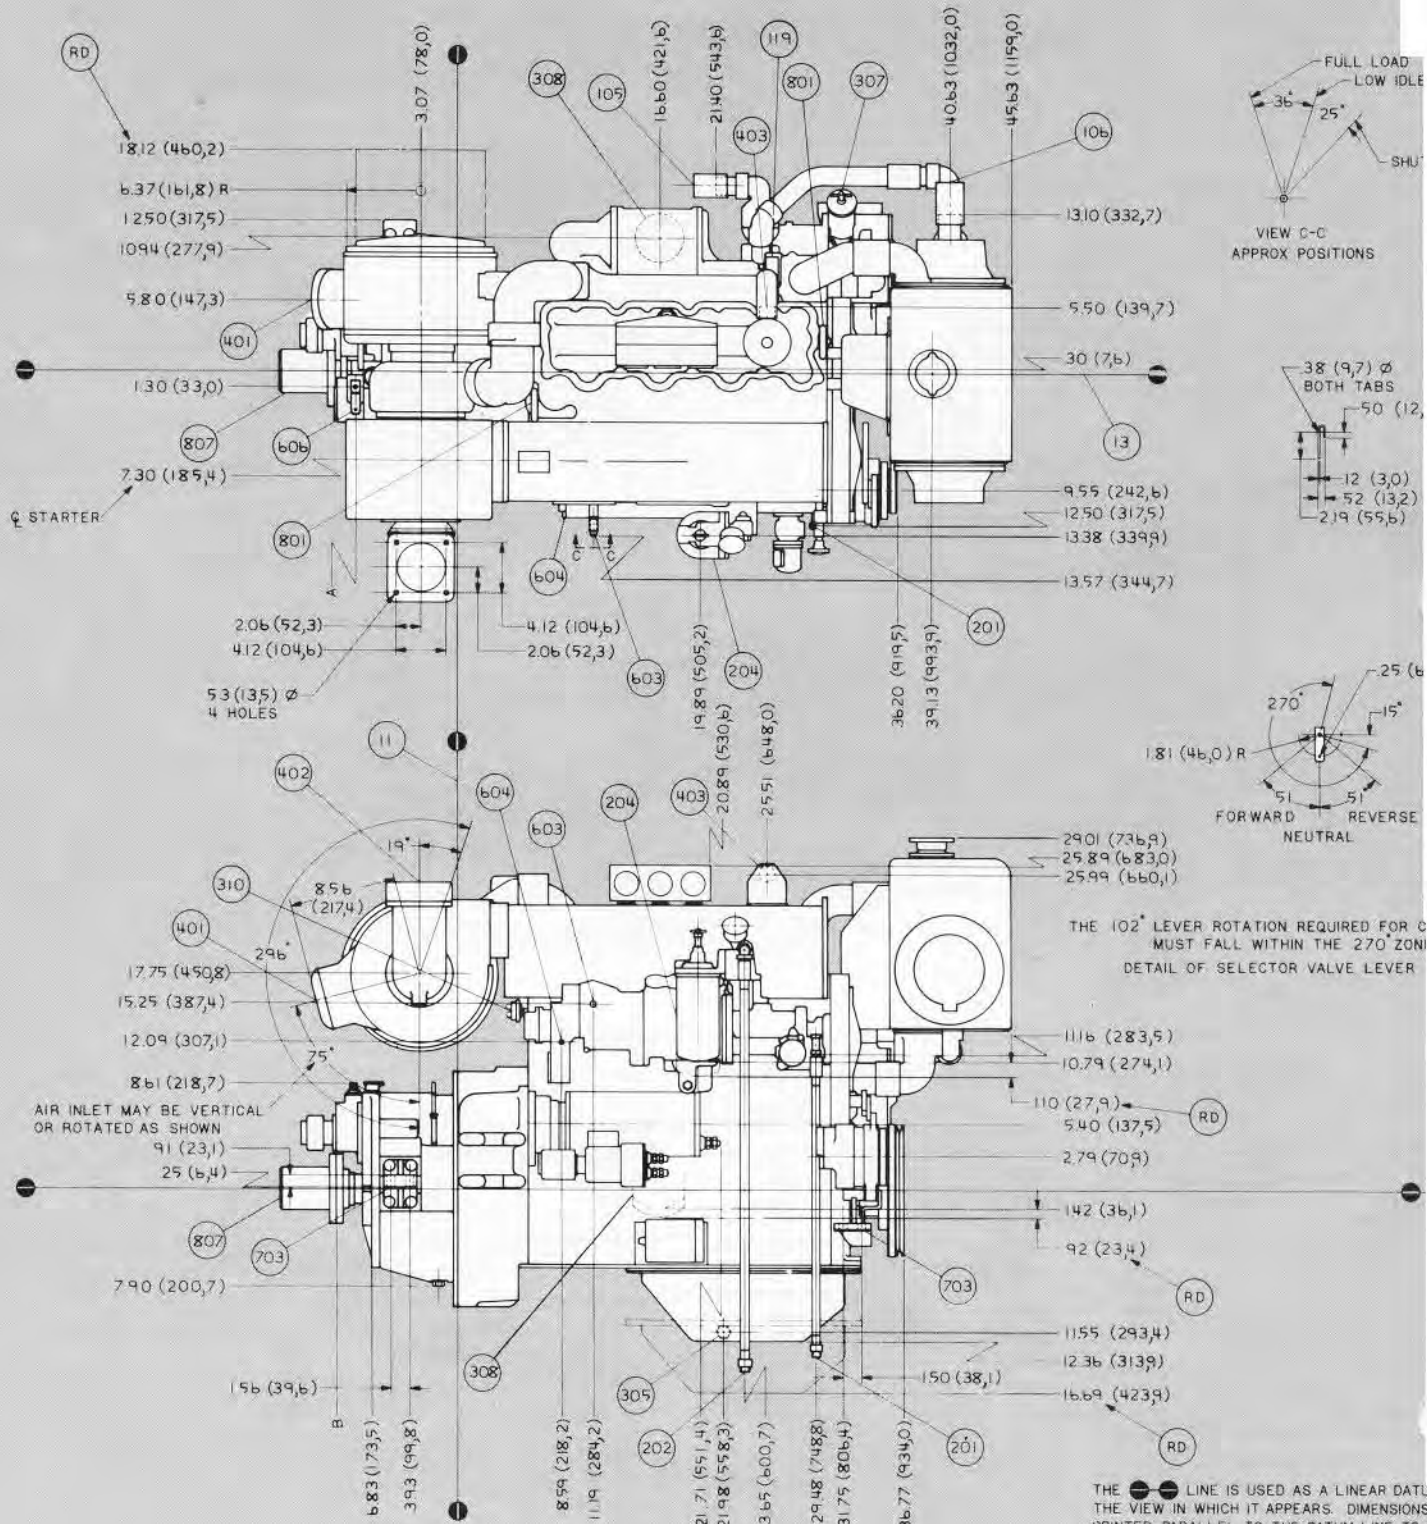


THE 102° LEVER ROTATION REQUIRED FOR C MUST FALL WITHIN THE 270° ZONE
DETAIL OF SELECTOR VALVE LEVER

THE LINE IS USED AS A LINEAR DATUM LINE IN THE VIEW IN WHICH IT APPEARS. DIMENSIONS PRINTED PARALLEL TO THE DATUM LINE TO WHICH THEY PERTAIN. DIMENSIONS WITH ARROWHEADS NOT PERTAIN TO THE DATUM LINE, EXCEPT IN AUXILIARY VIEWS.

*EXCESS FUEL SHOULD BE PIPED TO FUEL SUPPLY TANK TO ELIMINATE ENTRAINED AIR FROM SYSTEM

REFERENCE DRAWING #3N6608-0

- | | |
|---------------------------------|--|
| (11) REAR FACE OF FLYWHEEL HSG. | (401) AIR INLET 500 (127,0) ØD |
| (12) ½ ENGINE | (402) EXHAUST 4-STD PIPE TAP |
| (13) ½ CRANKSHAFT | (403) BREATHER OUTLET 131 (33,3) ID HOSE |
-
- | | |
|--|--|
| (105) SEA WATER INLET
162 (41,1) ID HOSE-275 (69,8) LONG | (603) GOVERNOR CONTROL SHAFT
5/8-36 SERRATIONS |
| (106) SEA WATER OUTLET
188 (47,8) ID HOSE-350 (88,9) LONG | (604) MANUAL SHUT-OFF SHAFT (SEE DETAIL) |
| (114) WATER MAKER SUPPLY
1/2-STD PIPE TAP | (606) SELECTOR VALVE LEVER (SEE DETAIL) |
| (115) WATER MAKER OUTLET
3/4-STD PIPE TAP | |
| (119) WATER TEMPERATURE CONTACTOR | |
| (201) FUEL INLET LINE 3/8-STD PIPE TAP
2400 (609,6) LONG | (703) CUSTOMER MOUNTING HOLES
66 (16,8) Ø 4 HOLES EACH SIDE |
| (202) FUEL RETURN LINE 3/8-STD PIPE TAP
3300 (838,2) LONG | |
| (203) FUEL PRIMING PUMP | |
| (204) FUEL FILTER | |
| | (801) LIFTING EYE |
| (303) OIL SUPPLY CONN 1/4-STD PIPE TAP | (803) SERVICE METER |
| (304) OIL PRESSURE CONN 1/8-STD PIPE TAP | (804) TACHOMETER DRIVE 1/2 ENGINE SPEED
CW ROT-SAE-HEAVY 3/16 KEY DRIVE |
| (305) OIL DRAIN 1/8-1/2 TAP | (807) COMPANION FLANGE (SEE DETAIL) |
| (307) OIL FILLER | (808) EITHER STARTING AID 1/4-STD PIPE TAP |
| (308) OIL FILTER | |
| (309) OIL LEVEL GAGE | |
| (310) OIL PRESSURE CONTACTOR | (RD) REMOVAL DISTANCE |

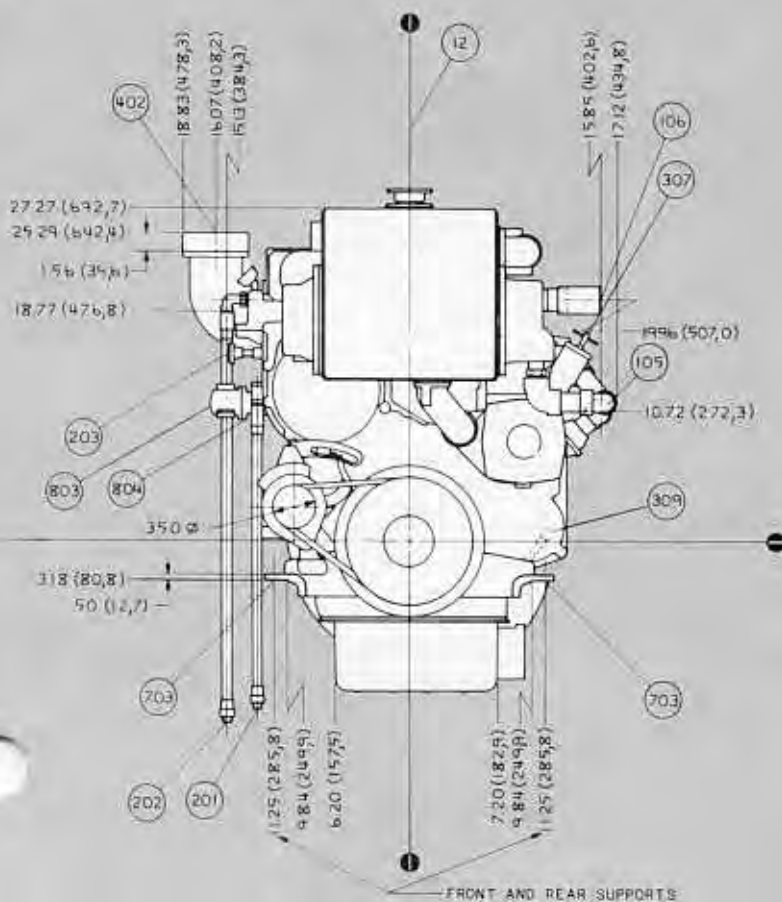

FOR AR PL5227-CHANGE D

FIGURES IN PARENTESIS () ARE IN MILLIMETRES

STANDARD EQUIPMENT INCLUDES*

Air Cleaner, Single-Stage, dry
 Alternator, Charging, 24 volt, 35 amp
 Breather, Crankcase
 Cooler, Lubricating Oil
 Drive, Tachometer, with Adapter
 Filters, Fuel, Lubricating Oil
 Flywheel and Flywheel Housing, SAE No. 2
 Gauge, Fuel Pressure
 Governor, Hydra-mechanical
 Lifting Eyes
 Paint, Caterpillar yellow
 Pumps, Fuel Priming, Jacket Water, gear-driven
 SAE Standard Rotation
 Service Meter
 Starting, Electric, 24-volt
 Supports
 Cooler, Marine Gear Oil
 Lines, Flexible Fuel
 Fuel Ratio Control
 Gear, Reverse and Reduction, Twin Disc MG506,
 includes propeller shaft flange.
 Governor Control Lever
 Heat Exchanger, installed, removable tube bundle.
 Manifold, Exhaust, Copper Nickel Watercooled
 Pump, Auxiliary (Sea Water), Gear-Driven
 Shutoff, Rack Solenoid
 Tank, Expansion


*Option of Engine only can be specified

ATTACHMENTS

- ☐ Rain cap, air cleaner, service indicator.
- ☐ Engine mounted controls, positive locking and vernier options, remote actuated, single cable, right side.
- ☐ Pilot house controls, single and two-lever, cable and fittings.
- ☐ Keel cooling conversion (excludes keel cooler).
- ☐ Exhaust fittings, elbows, water cooled elbows, mufflers for horizontal and vertical installations.
- ☐ Primary fuel filters
- ☐ Electric and mechanical tachometers, single and dual engines.
- ☐ Instrument panels, engine mounted or for pilot house, electric or mechanical instrumentation.
- ☐ Auxiliary drives, gear and pulley driven.
- ☐ Front enclosed clutch, Twin-Disc.
- ☐ Alarm switch, oil pressure and water temperature.
- ☐ Air starting motor, includes fuel priming pump, air receiver, pressure reducing air valve.
- ☐ Hydraulic starting.
- ☐ Battery sets for electric starting, glow plugs.
- ☐ Bilge and deck-washing pumps.

RATING CURVES—SHAFT HORSEPOWER

— TURBOCHARGED — NATURALLY ASPIRATED

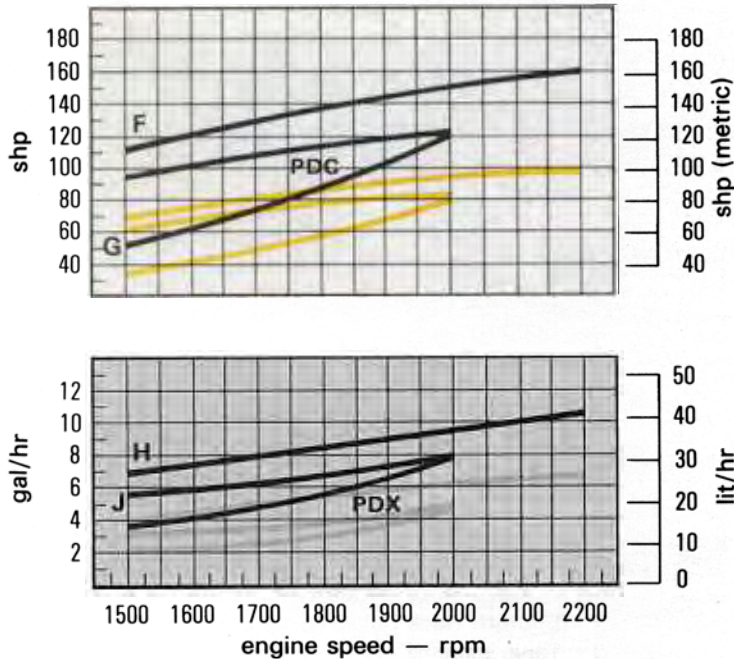

PDC—TYPICAL PROP. DEMAND CURVE FROM 121 SHP AT 2000 RPM
PDX—TYPICAL PROP. DEMAND FUEL CONSUMPTION CURVE FROM 121 SHP AT 2000 RPM
PDC—TYPICAL PROP. DEMAND CURVE FROM 82 SHP AT 2000 RPM
PDX—TYPICAL PROP. DEMAND FUEL CONSUMPTION CURVE FROM 82 SHP AT 2000 RPM

F—INTERMITTENT (DIN 6270—N₀)—SHAFT HORSEPOWER
G—CONTINUOUS (DIN 6270—N₀)—SHAFT HORSEPOWER
H—FUEL CONSUMPTION BASED ON CURVE F
J—FUEL CONSUMPTION BASED ON CURVE G

MARINE GEAR	GEAR RATIOS
Twin-Disc MG506	1.97:1 Forward and Reverse 2.96:1 Forward and Reverse 3.79:1 Forward and Reverse 4.48:1 Forward and Reverse

- ☐ Certification by major marine classification societies is available.
- ☐ Auxiliary-power engine configurations can be specified. Consult your application specialist.

RATINGS:

INTERMITTENT is the horsepower and speed capability in applications having variable speed and/or load requirements.

CONTINUOUS is the horsepower and speed capability that can be utilized without interruption or load cycling.

OTHER RATINGS: Published intermittent and continuous ratings are a general guide for world-wide use over a broad application range. Other ratings, yielding higher performance and economic return, are available to meet the requirements of particular applications.

Intermittent and continuous metric performance at 736mm (28.97 In. Hg.) and 20°C (68°F)—DIN 6270.

Fuel consumption is based on fuel oil having a HHV of 19,590 btu/lb (45,570 kJ/kg) and weighing 7.076 lb. per U.S. Gal. (848 gm per litre). Engine equipped with fuel, lube oil, and jacket water pumps.

MARINE GEAR SPECIFICATIONS . . .

TWIN-DISC MG506

- ☐ Adjustment-free oil-bathed multiple-disc sintered metal clutches . . . hydraulically controlled . . . separate clutch pack for forward and reverse.
- ☐ Gears in constant mesh, full power for both forward and reverse duty . . . twinning flexibility.
- ☐ Lubricant strained and cooled before entering pressurized system.
- ☐ Hardened, ground and honed gears.
- ☐ Come-Home lock-up feature.
- ☐ Warranted by Caterpillar.

