For Your Convenience: This Isuzu File Is Shared By Diesel Parts Direct



YOUR ONE STOP SUPERSTORE FOR DIESEL ENGINE PARTS



Isuzu Diesel Engines



4LE1T

Generator: 41 HP @ 1800 RPM Industrial Drive: 62 HP @ 2500 RPM

Standard features:

- U.S. EPA Tier 4 Interim
- Displacement: 2.2 L
- Turbo charged with cooled EGR
- Peak torque: 136.0 LB/FT @ 1800 RPM
- Fuel consumption: .415 LB/HP-HR
- Flywheel housing: SAE 4 & 5
- Electric & self-priming fuel lift pump
- 12V and 24V available
- Glow plug starting aid
- High angularity oil pan
- 250-hour service intervals
- 5-year / 5,000-hour warranty

The power behind it all.



Isuzu Diesel Engines Generator: 41 HP @ 1800 RPM Industrial Drive: 62 HP @ 2500 RPM Standard features: • U.S. EPA Tier 4 Interim • Fuel consumption: • 12V and 24V available .415 LB/HP-HR • Displacement: 2.2 L Glow plug starting aid • Flywheel housing: SAE 4 & 5 • Turbo charged with cooled EGR High angularity oil pan • Electric & self-priming

fuel lift pump

The power behind it all.

• Peak torque: 136.0 LB/FT

@ 1800 RPM



• 250-hour service intervals


• 5-year / 5,000-hour warranty




The power behind it all.





4LE1T Industrial Performance Curves:

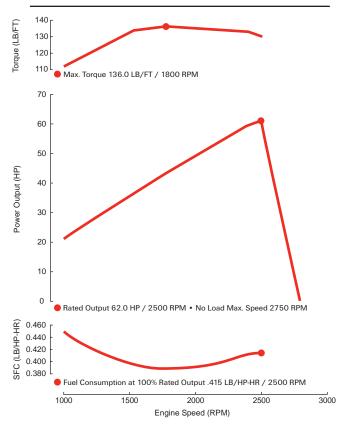

4LE1T Genset Performance Curves:

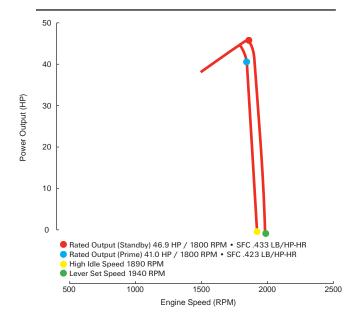





Available options:

- Cooling system
- Air cleaner
- Exhaust system
- Front and rear mounts
- Skid base
- Instrument panel
 Extension harness
- Custom power unit

Horsepower comparison:

Engine Model	Cylinders	Displacement (L)	HP Range
4LE1	4	2.2	30-50
4LE1T	4	2.2	40-60
4JJ1T	4	3.0	65-90

For additional information, please contact your local distributor or visit www.isuzuengines.com

Isuzu Motors America, LLC

46401 Commerce Center Drive Plymouth, Michigan 48170 Phone: 734.582.9470

Fax: 734.455.7581

ILS-4LE1T-C