



NOTE:
TO INSURE NO PRELOAD ON SHIFTING
MECHANISM, HAND LEVER POSITION SHOULD
BE SLIGHTLY PAST VERTICAL POSITION OR
TOWARDS ENGINE.

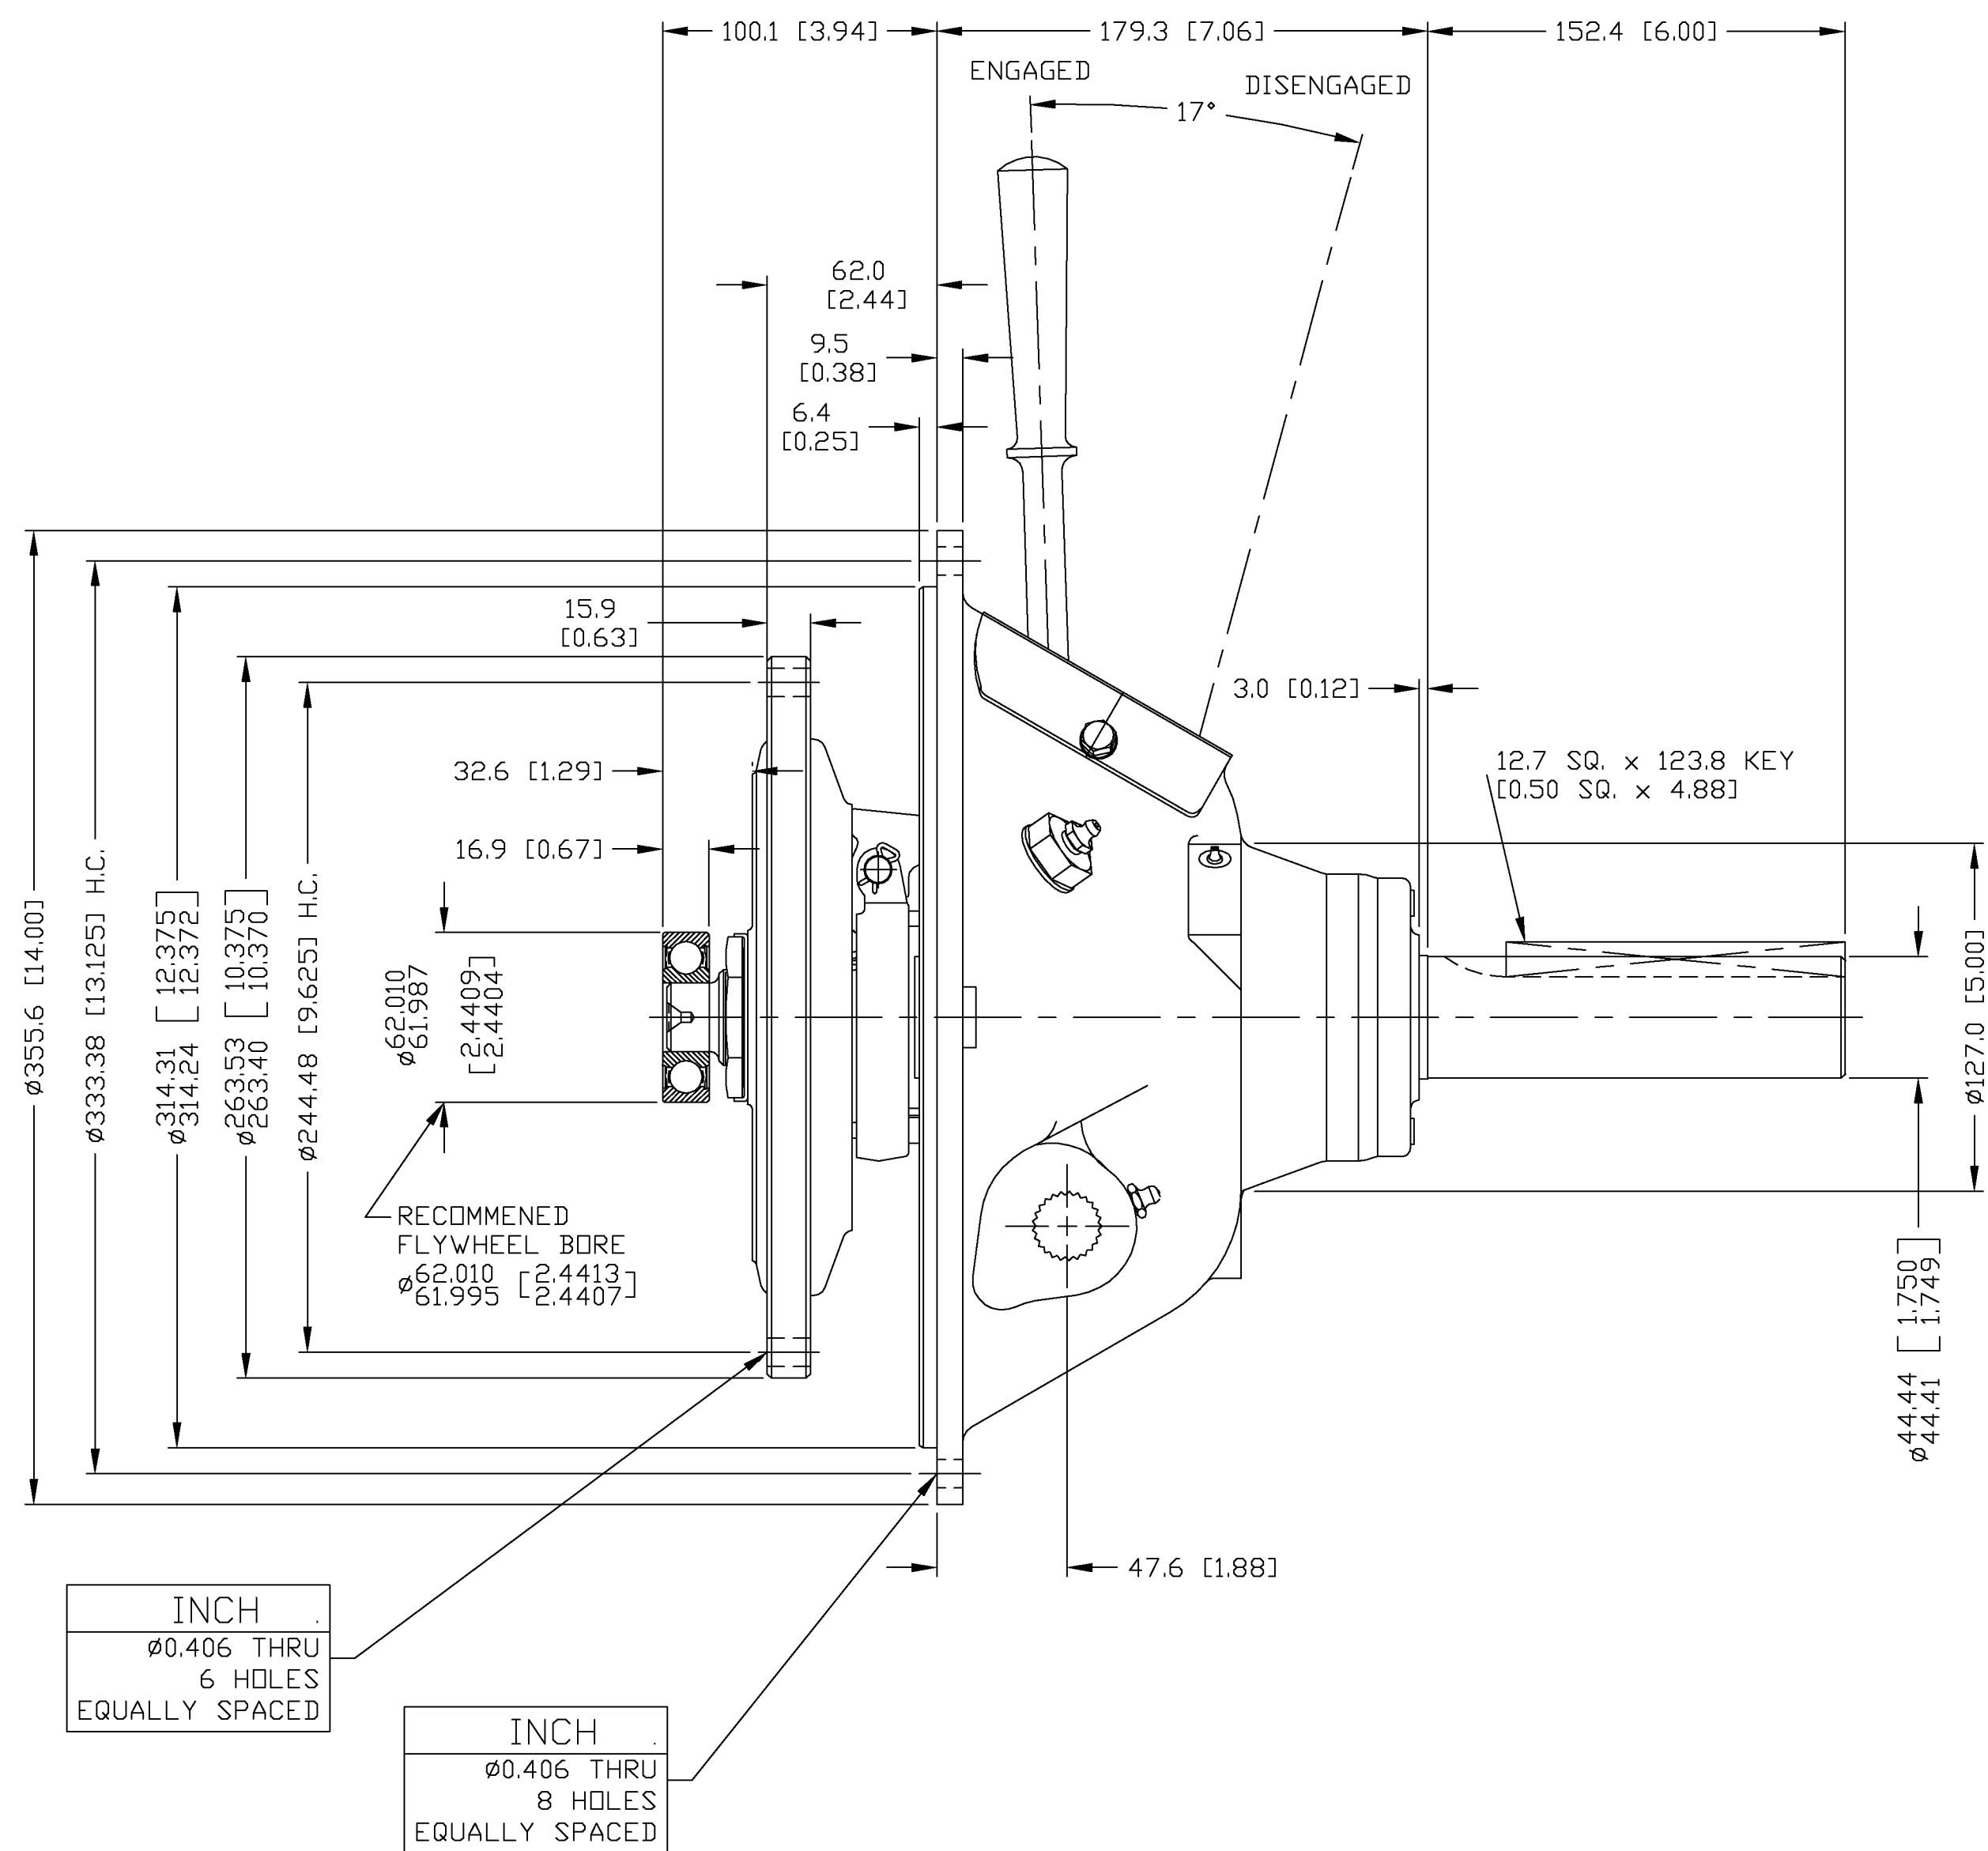

INCH
3/8-16 UNC THRU
2 HOLES, 180° APART

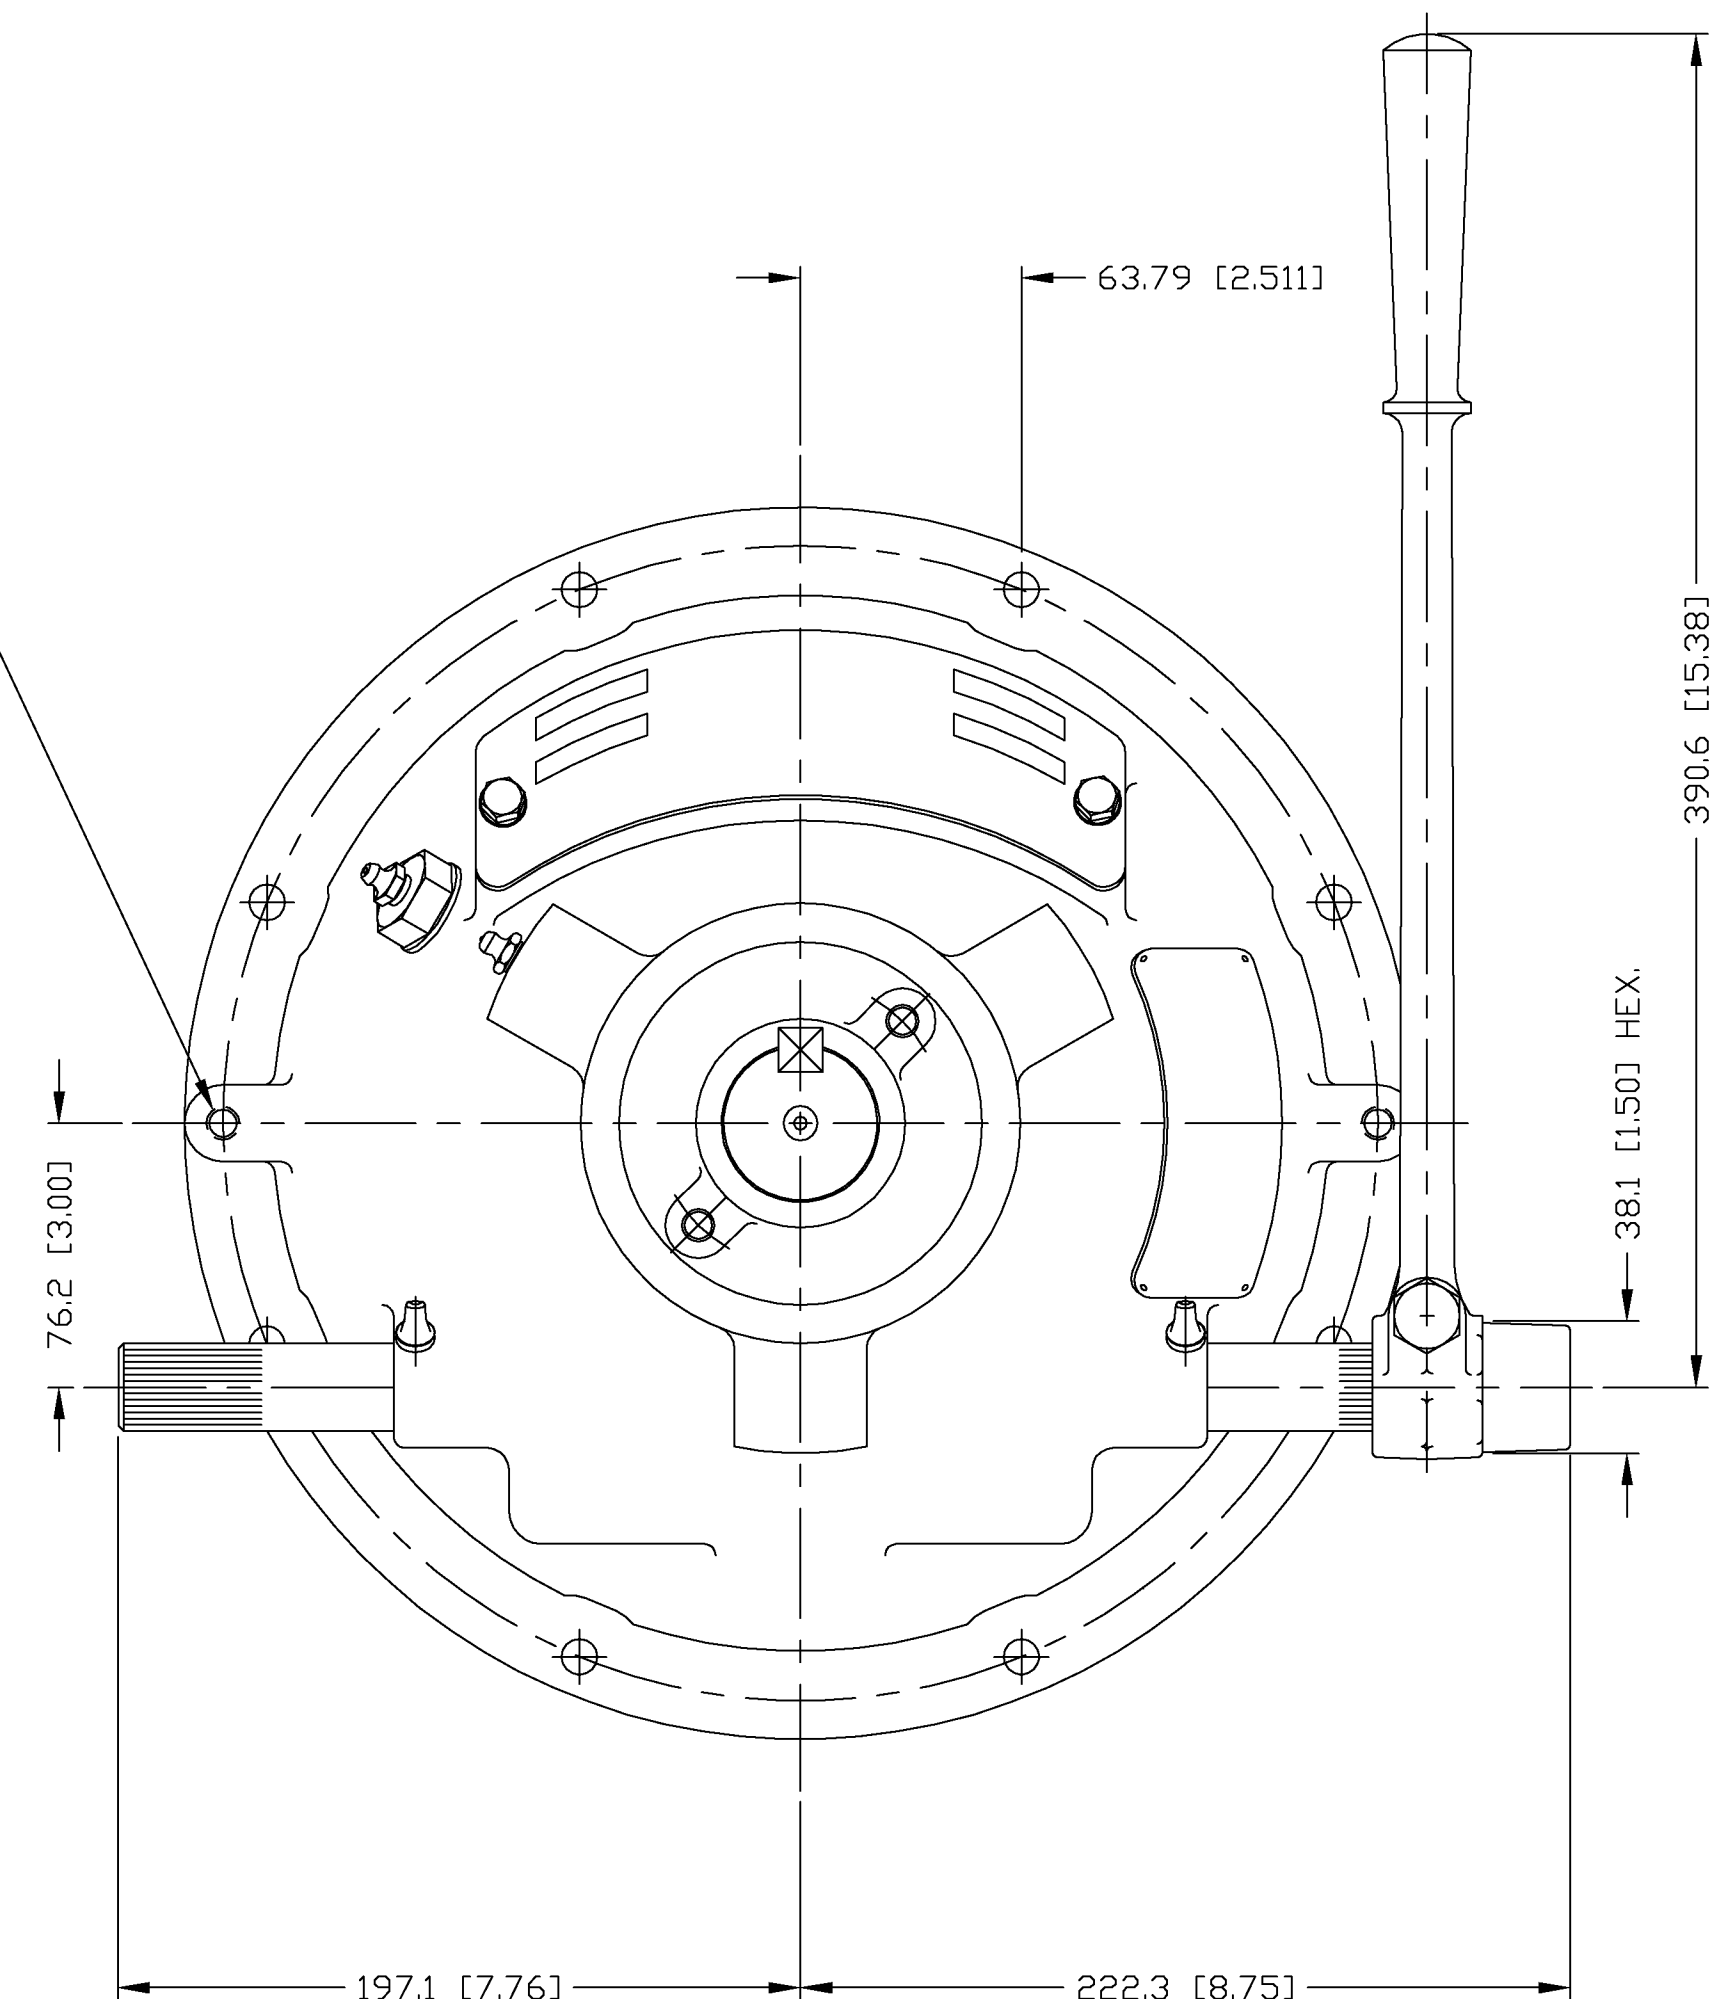

GENERAL NOTES:
a.) REFER TO BILL OF MATERIAL WHEN ORDERING PARTS.
b.) REFER TO CARE & OPERATION MANUAL FOR ADDITIONAL INFO.

INCH
Ø0.406 THRU
6 HOLES
EQUALLY SPACED

INCH
Ø0.406 THRU
8 HOLES
EQUALLY SPACED

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN
MILLIMETERS
MACHINED DIMENSIONS
X ±0.75
XX ±0.25
XXX ±0.13
ALL ANGULAR TOLERANCES ±1°
GEOMETRIC TOLERANCING
PER ASME Y14.5M 1994

WEIGHT
kg

WRP
N.A.

FIRST USE
ASSY. CX108P501
MODEL C108HP5
NOTICE: THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE
USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF
TWIN DISC, INCORPORATED
THIS NOTICE IS NOT INTENDED TO WAIVE OR LIMIT RIGHTS GRANTED TO
THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.

METRIC
THIRD ANGLE
PROJECTION

MATERIAL

HEAT TREAT

SIMILAR TO

NAME
C108HP5
POWER TAKEOFF

DATE
02-05-96
SCALE
1:50 = 1
DRN:
DJH
CHK:
JTS
APPD:
JTS

TWIN DISC
INCORPORATED
RACINE, WI 53403 - USA
CX108P501

DWG SIZE: A1 SH: 2 OF 2 REV D